



SLC PIXEL X10 R280 WB 1653TED 3000K CRI90 IP20

14/03/2023

SLC1274



Product description

With the SLC Pixel, we are expanding our range of angular recessed luminaires. Pixel comes as a 3-, 5- and 10-lamp recessed ceiling spotlight. Pixel is suitable for offices as well as living and sales rooms. It will be in stock in June 2022

With the SLC Pixel, we are expanding our range of angular recessed luminaires. Pixel comes as a 3-, 5- and 10-lamp recessed ceiling spotlight. Pixel is suitable for offices as well as living and sales rooms. Pixel emits its light at an angle of 36°. The light is distributed directly, which enables targeted illumination of individual areas. The light quality and colour fidelity is very high with CRI >90. The design of the luminaire made of aluminium is timeless.

Technical data

Suitable for built-in mounting	Yes
Adjustability	Not adjustable
With light source	Yes
Surface protection	Powder coating
Material cover	Plastic, opal
Nominal voltage	200 - 240 Volt
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Diffuser lens/optic/panel
Reflector colour	Silver
Light outlet	Direct
Degree of protection (IP)	IP21

Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Housing material	Aluminium
Housing colour	White
Voltage type	AC/DC
Nominal current	700 - 700 Milliampere
With control gear	Yes
Reflector	Other
Light sharing	Symmetric
Beam angle	Medium beam 21-40°
Energy efficiency class of the light source	D
Impact strength	IK06







Protection class	II
Max. system power	24,7 Watt
Colour temperature	3000 - 3000 Kelvin
Luminous flux	1653 - 1653 Lumen
Power factor	0,9
Luminous flux adjustable	Continuously variable
Width	45 Millimetre
Length	280 Millimetre
Built-in height/depth	51 Millimetre
Built-in diameter	280 - 280 Millimetre
Number of poles	3
Connectable conductor cross section	0,75 - 2,5 Square millimetre
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index (CRI/Ra)	90
Glare (UGR)	UGR<19
Operating temperature	-20°C ~ +45°C
Dimming method	Trailing edge, On/Off
Dimming range	1-100%
Produced by	The Light Group

Rated ambient temperature according to IEC -20 - 45 Degrees celsius

Colour of light	White
Colour rendering index CRI	90-100
Rated luminous flux according to IEC 62722-	1653 Lumen
Colour of light adjustable	No
Beam angle adjustable	No
Height/depth	51 Millimetre
Built-in width	37 Millimetre
Built-in length	272 Millimetre
Type of wiring	Suitable for through wiring
Conductor cross section	0,75 Square millimetre
Connection type	Insulation displacement connector
Strain relief	Yes
Beam angle (°)	36
Exterior color	White
Can be installed directly into the insulation	No
Dimmable	Yes
Brand	SLC
RAL Colour	RAL9003

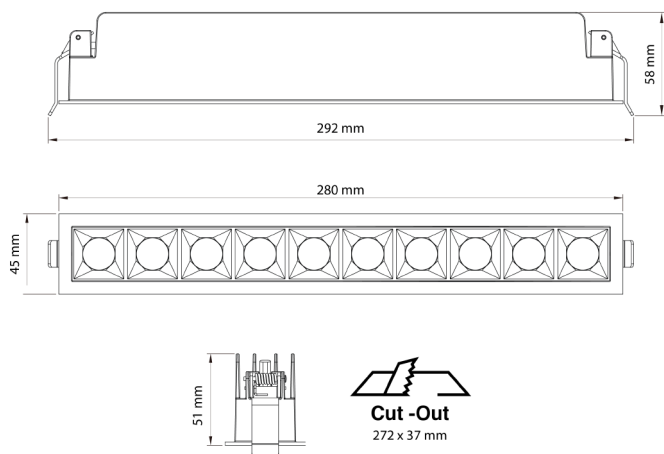


Spectrum

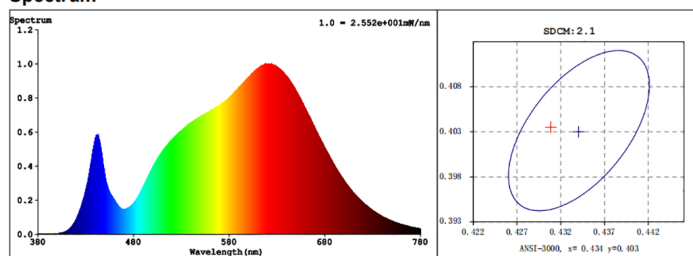

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4308$ $y = 0.4038$ / $u' = 0.2467$ $v' = 0.5204$ ($duv=7.96e-04$)
CCT= 3105K Prcp WL: $L_d=582.1nm$ Purity=50.5%
Peak WL: $L_p=618nm$ FWHM: $=169.2nm$ Ratio: $R=23.4\%$ $G=74.1\%$ $B=2.5\%$
Render Index: $R_a = 90.6$ TM30: $R_f=89$ $R_g=101$
 $R_1=92$ $R_2=92$ $R_3=92$ $R_4=92$ $R_5=91$ $R_6=90$ $R_7=92$
 $R_8=84$ $R_9=59$ $R_{10}=82$ $R_{11}=94$ $R_{12}=80$ $R_{13}=91$ $R_{14}=95$ $R_{15}=88$
CQS Parameters: $Q_a = 90.2$



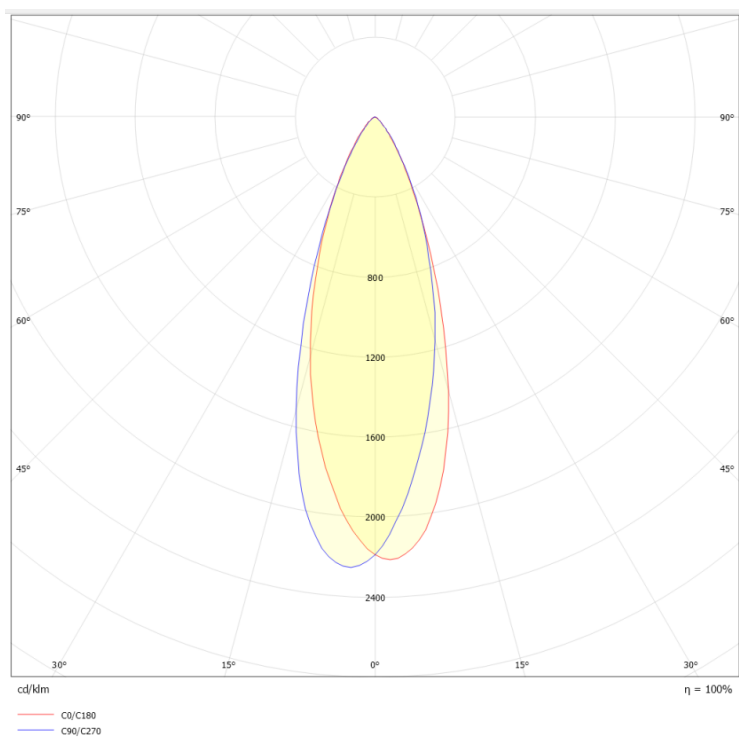

ENERG

Scandinavian Lighting Concept
SLC1274

A
B
C
D
E
F
G

D

22
kWh/1000h

2019/2015

