





SLC LED CEILING S250 1080TED 2700K CRI80 IP54 OP

SLC1060



03/06/2024

Product description

Dimmable with TED (Trailing edge) dimmers. Recommended dimmer: SLC SmartOne (S24019). With opal shield for a comfortable lighting experience. Wall or ceiling mounting. Perfect for hallways, stairs, bathrooms, and wardrobes. Push connector with strain relief. Quick installation.

Dimmable with TED (Trailing edge) dimmers Recommended dimmer: SLC SmartOne (S24019) With opal shield for a comfortable lighting experience Wall or ceiling mounting Perfect for hallways, stairs, bathrooms, and wardrobes Push connector with strain relief Quick installation

Technical data


Suitable for suspended mounting	No
Suitable for built-in mounting	No
Lamp type	LED not exchangeable
Housing material	Plastic
Material cover	Plastic, opal
Voltage type	AC
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Dimming RF	No
Light sharing	Symmetric
Light outlet	Direct
Impact strength	IK08

Suitable for ceiling mounting	Yes
Suitable for surface mounting	Yes
With light source	Yes
Housing colour	White
Type of grid	Matt
Nominal voltage	220 - 240 Volt
With control gear	Yes
Dimming programmable	No
Light distributor	Diffuser lens/optic/panel
Beam angle	Open beam/diffuse
Degree of protection (IP)	IP54
Protection class	II



THE LIGHT GROUP AS Sagmyra 2A, 4624 | Kristiansand S | Norway Tel.: +47 38 00 21 01 | E-Mail : post@tlg.no








Rated ambient temperature according to IEC -20 - 50 Degrees celsius

Suitable for lamp power	12 - 12 Watt
Luminaire efficacy	90 Lumen/Watt
Colour of light	White
Colour rendering index CRI	80-89
Width	250 Millimetre
Length	250 Millimetre
Type of wiring	Suitable for through wiring
Connection type	Push-in clamp
Beam angle fixed	120
Color	White
Control type	Trailing edge
GTIN	7070938056557

Emergency power supply integrated	Yes
Max. system power	12 Watt
Rated luminous flux according to IEC 62722-	1080 Lumen
Colour temperature	2700 - 2700 Kelvin
Power factor	0,9
Height/depth	53 Millimetre
Outer diameter	250 Millimetre
Number of poles	3
Power factor	0,9
Glare (UGR)	UGR<19
Operating temperature (Ta)	-10°C ~ +45°C
Brand	SLC
Produced by	The Light Group

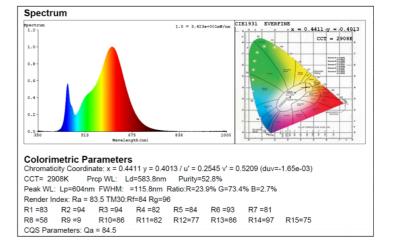




THE LIGHT GROUP GmbH Am Schafbrinke 62 | 30519 Hannover | Germany Tel.: +49 (0)511 - 807 486 10 | E-Mail: info@tlg.no

THE LIGHT GROUP AS Sagmyra 2A, 4624 | Kristiansand S | Norway Tel.: +47 38 00 21 01 | E-Mail : post@tlg.no



The Light Group Datasheet

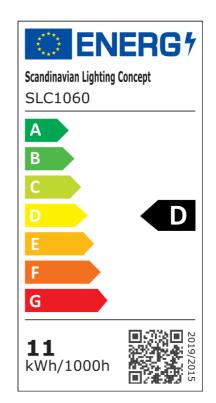

Scandinavian Lighting Concept



THE LIGHT GROUP GmbH Am Schafbrinke 62 | 30519 Hannover | Germany Tel.: +49 (0)511 - 807 486 10 | E-Mail: info@tlg.no

THE LIGHT GROUP AS Sagmyra 2A, 4624 | Kristiansand S | Norway Tel.: +47 38 00 21 01 | E-Mail : post@tlg.no